

ONDU

/MARCO ACERBIS



ONDU

/MARCO ACERBIS

Ondu is a compact indirect light wall lamp with clean lines, made from a single block of solid aluminium, machined using computer numerical control (CNC) technology.

Its square yet undulating shape transforms a simple geometric element into an object with strong architectural connotations.

Thanks to its contrasting arched profiles, it creates a fascinating encounter between curves and straight lines in balance and harmony. All Ondu profiles are lively and angular, creating sinuous spatial lines accentuated by soft, diffused light. Ondu integrates into the space, becoming an architectural element in its own right.


Ondu stands out for its excellent light output levels, placing it at the top of this type of product.

Ondu è una lampada da parete a luce indiretta compatta e dalle linee pulite, ottenuta da un unico blocco di alluminio pieno, lavorato con macchinari a controllo numerico (CNC).



La sua forma squadrata e allo stesso tempo ondulata trasforma un semplice elemento geometrico in un oggetto dalla forte connotazione architettonica. Grazie ai suoi profili ad archi contrapposti si ottiene un affascinante incontro tra curve e rette in equilibrio e armonia. Tutti i profili Ondu sono vivi e spigolosi, e creano linee spaziali sinuose, accentuate da una luce morbida e avvolgente. Ondu si integra nello spazio diventando esso stesso elemento architettonico.

Ondu emerge per gli ottimi livelli di emissione luminosa, ponendola al vertice in questa tipologia di prodotti.



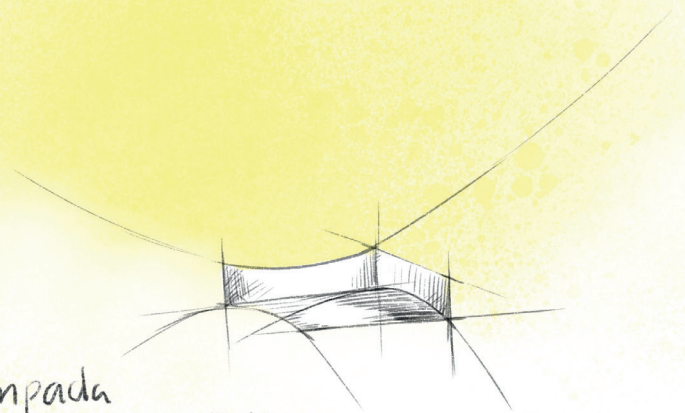


Una lampada
fortemente architettonica
in equilibrio tra

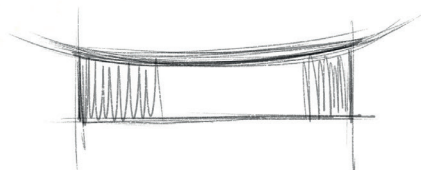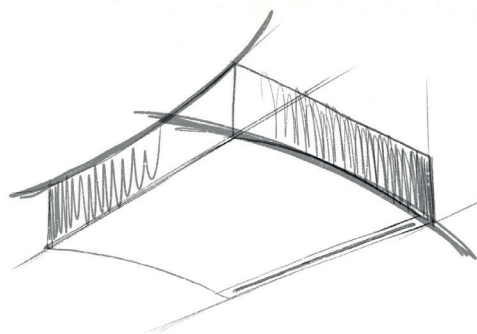

curve e linee dritte
come le arcate

delle grandi architetture della Roma antica

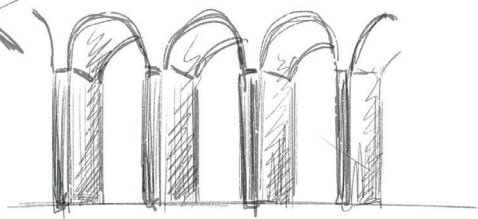












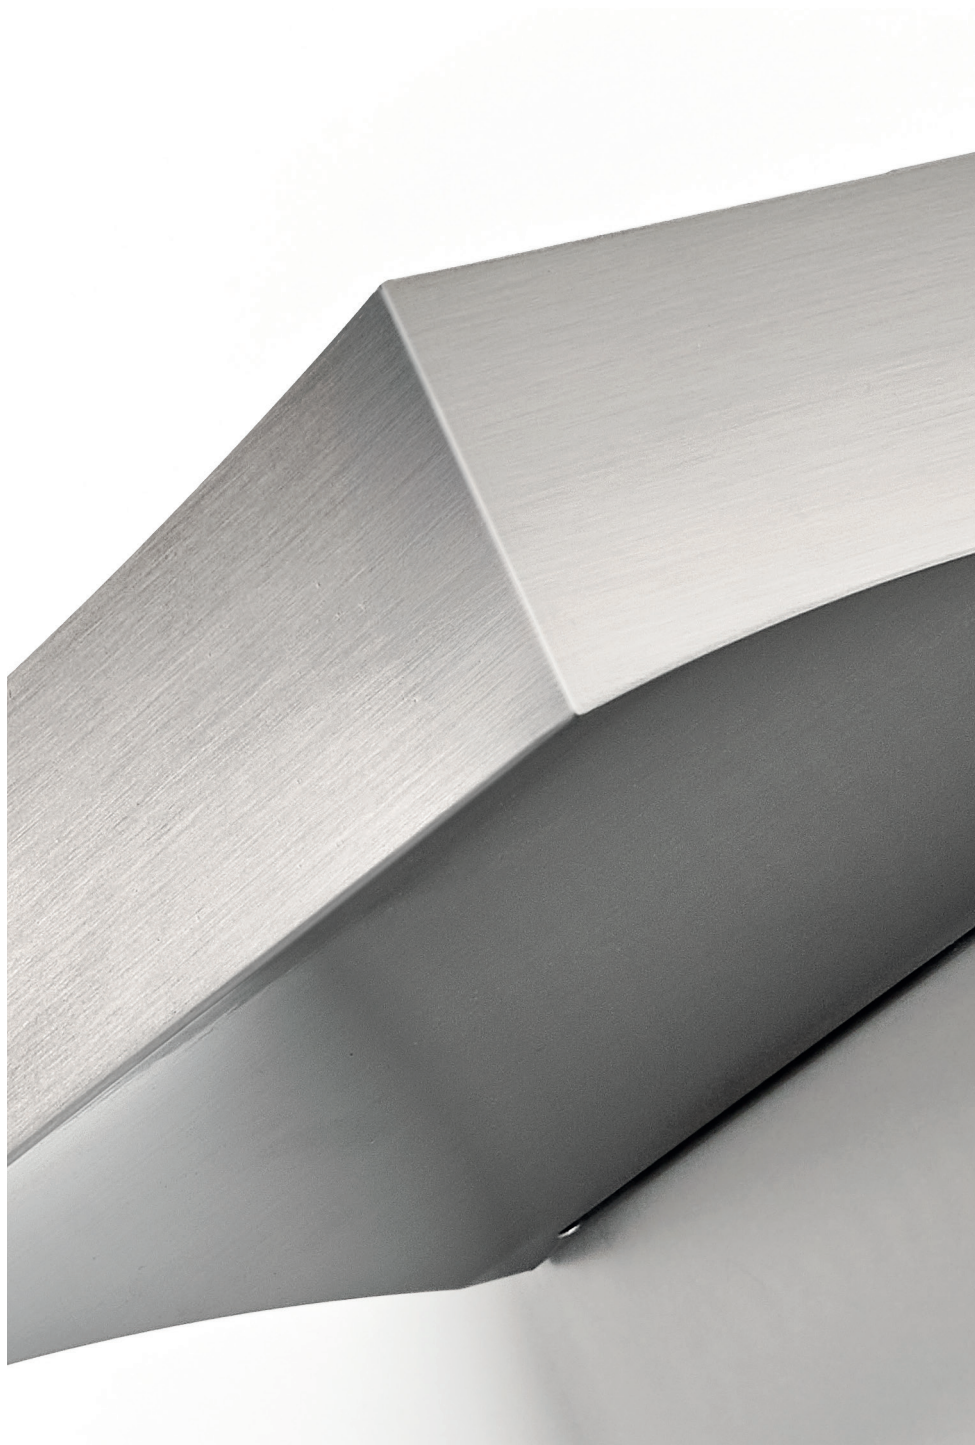

TECHNICAL DATA

ONDU/ONDU MODULAR

Marco Acerbis | 2025



FINISHINGS

Matt White


Anodised Brass

Brushed Nickel



Anodised Black

Anodised Aluminium



3,6



13

16

LIGHT EMISSION

Light source power: 18W
Power absorption: 20W
Light Direction: Indirect
CCT: 2700/3000K
CRI: >90
Lifetime: >55000h

Source Flux 2700K: 2650lm@500mA
Emitted Flux 2700K: 1927lm
Efficacy 2700K: 96lm/W

Source Flux 3000K: 2761lm@500mA
Emitted Flux 3000K: 1966lm
Efficacy 3000K: 98lm/W

Dimming Options: Push dim - Triac
At client's discretion for Ondu Modular

ELECTRICAL FACTS

Stand-by absorption: <0.6W
Mains Voltage: 220/240VAC
Master output: 500mA
Ta max: 40°C

CONTACTS

Lumina Italia srl

Via Casorezzo, 63
20004 Arluno
Milano - Italy
T. +39 02903752

info@lumina.it
lumina.it

